

Perforated Hose Clamps

Hose Clamps

TORK perforated hose clamps are designed for use in many general applications, they are popular, precise and economical.

The clamp fits perfectly on the hose and ensures the best sealing of the connection

- The tightening range and standard number are indicated on the product
- Easy & safe assembly with improved cover and screw design
- Philips screw is advantageous over flat screws and is used by many factories and end users,
- Burr-free and convex edges preventing the hose from being damaged
- Triangular design that prevents the form from being distorted




Product Code	Diameter Ø		Band Width	Band Thickness	Max. Torque Resistance	Pcs inside box
	mm	inch	mm	mm	Nm	
HR085W1-008012-101	8-12	5/16" - 1/2"	8.5	0.60	2.5	1.000
HR085W1-010016-101	10-16	3/8" - 5/8"	8.5	0.60	2.5	1.000
HR085W1-012020-101	12-20	1/2" - 3/4"	8.5	0.70	4.0	1.000
HR085W1-013019-101	13-19	1/2" - 3/4"	8.5	0.70	4.0	1.000
HR085W1-016025-101	16-25	5/8" - 1"	8.5	0.70	4.0	1.000
HR010W1-019026-101	19-26	3/4" - 1 1/3"	10	0.80	5.0	1.000
HR010W1-020032-101	20-32	3/4" - 1 1/4"	10	0.80	5.0	1.000
HR010W1-023035-101	23-35	8/9" - 1 1/4"	10	0.80	5.0	800
HR010W1-025040-101	25-40	1" - 1 5/8"	10	0.80	5.0	700
HR010W1-028048-101	28-48	1 3/32" - 1"	10	0.80	5.0	600
HR010W1-030045-101	30-45	7/8"	10	0.80	5.0	600
HR010W1-032050-101	32-50	1 1/6" - 1 3/4"	10	0.80	5.0	600
HR010W1-040060-101	40-60	1 1/4" - 2"	10	0.80	5.0	400
HR010W1-044064-101	44-64	1 5/8" - 2"	10	0.80	5.0	400
HR010W1-050070-101	50-70	3/8"	10	0.80	5.0	400
HR010W1-060080-101	60-80	1 3/4" - 2"	10	0.80	5.0	300
HR010W1-070090-101	70-90	1/2"	10	0.80	5.0	100
HR010W1-080100-101	80-100	2" - 2 3/4"	10	0.80	5.0	100
HR010W1-090110-101	90-110	2 3/8" - 3"	10	0.80	5.0	100
HR010W1-100120-101	100-120	1/8"	10	0.80	5.0	50
HR010W1-110130-101	110 - 130	4 3/8 - 5 1/8	10	0.80	5.0	50
HR010W1-120140-101	120-140	1/2"	10	0.80	5.0	50
HR010W1-130150-101	130-150	3 1/8" - 4"	10	0.80	5.0	50
HR010W1-140160-101	140-160	3 1/2 - 4"	10	0.80	5.0	50
HR010W1-150170-101	150-170	3/8"	10	0.80	5.0	50
HR010W1-160180-101	160-180	4" - 4 3/4"	10	0.80	5.0	50
HR010W1-170190-101	170-190	4 3/8" - 5"	10	0.80	5.0	40
HR010W1-180200-101	180-200	1/8"	10	0.80	5.0	25
HR010W1-190210-101	190-210	4 3/4" - 5"	10	0.80	5.0	25
HR010W1-200220-101	200-220	1/2"	10	0.80	5.0	25
HR010W1-210230-101	210-230	5 1/8" - 5"	10	0.80	5.0	25
HR010W1-220240-101	220-240	7/8"	10	0.80	5.0	25
HR010W1-230250-101	230-250	5 1/2" - 6"	10	0.80	5.0	25
HR010W1-240260-101	240-260	1/4"	10	0.80	5.0	25
HR010W1-250270-101	250-270	5 7/8" - 6"	10	0.80	5.0	25

Perforated Hose Clamps

Hose Clamps

Dimensions

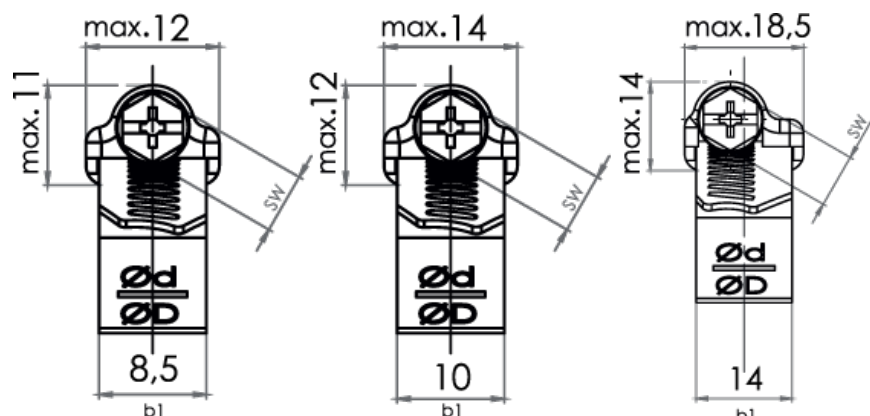

Technical Specifications

- Hardware
- Household appliances
- Agriculture
- Gas Filled Bottles
- LPG – Autogas Systems
- Building Sector
- Mechanical Applications
- Solar Energy Systems
- Signalization Systems

Product Code	Diameter Ø		Band Width	Band Thickness	Max. Torque Resistance ₁	Pcs inside box
	mm	inch	mm	mm	Nm	
HR014W1-019026-101	19-26	3/4"-1 1/32"	14	0.80	6.0	600
HR014W1-020030-101	20-30	3/4"-1 3/16"	14	0.80	6.0	500
HR014W1-022036-101	22-36	7/8"-1 27/64"	14	0.80	6.0	450
HR014W1-025042-101	25-42	1"-1 21/32"	14	0.80	6.0	400
HR014W1-028048-101	28-48	1 3/32"-1 7/8"	14	0.80	7.9	350
HR014W1-032051-101	32-51	2 1/4"-2"	14	0.80	7.9	350
HR014W1-038058-101	38-58	1 1/2"-1 9/32"	14	0.80	7.9	300
HR014W1-044064-101	44-64	1 3/4"-2 1/2"	14	0.80	7.9	250
HR014W1-051072-101	51-72	2"-2 28/32"	14	0.80	9.0	200
HR014W1-057076-101	57-76	2 1/4"-3"	14	0.80	9.0	200
HR014W1-065082-101	65-82	2 9/16"-3 15/64"	14	0.80	9.0	200
HR014W1-076092-101	76-92	3"-3 5/8"	14	0.80	9.0	150
HR014W1-085103-101	85-10	3 1/2"-4 1/16"	14	0.80	9.0	125
HR014W1-092110-101	92-110	3 5/8"-4 21/64"	14	0.80	9.0	125
HR014W1-105121-101	105-121	4 9/64"-4 49/64"	14	0.80	9.0	100
HR014W1-115135-101	115-135	4 17/32"-5 5/16"	14	0.80	9.0	100
HR014W1-130146-101	130-146	5 1/8"-5 3/4"	14	0.80	9.0	75
HR014W1-146164-101	146-164	5 3/4"-6 29/64"	14	0.80	9.0	75
HR014W1-150170-101	150-170	5 7/8"-6 11/16"	14	0.80	9.0	50
HR014W1-160180-101	160-180	6 1/4"-7 1/32"	14	0.80	9.0	40
HR014W1-170190-101	170-190	6 11/16"-7 31/64"	14	0.80	9.0	25
HR014W1-180200-101	180-200	7 1/32"-7 7/8"	14	0.80	9.0	25
HR014W1-190210-101	190-210	7 31/64"-8 17/64"	14	0.80	9.0	25
HR014W1-200220-101	200-220	7 7/8" - 8 5/8"	14	0.80	9.0	25
HR014W1-210230-101	210-230	8 1/4" - 9	14	0.80	9.0	25
HR014W1-220240-101	220-240	8 5/8" - 9	14	0.80	9.0	25
HR014W1-230250-101	230-250	9 1/16" - 9 7/8"	14	0.80	9.0	25
HR014W1-240260-101	240-260	9 7/16" - 10	14	0.80	9.0	25
HR014W1-250270-101	250-270	9 7/8" - 10	14	0.80	9.0	25

Producible Quality Types

	Bands	Covers	Screws	Corrosion resistance
W1	1.0330 or equivalent	1.0330 or equivalent	1.0263 or equivalent	144 hours
W2	1.4016 or equivalent	1.4016 or equivalent	1.0263 or equivalent	72 hours

Quality Standard: DIN 3017 ve TS12091

Environment: Does not contain chromium VI. Compliant with ROHS, WEEE and ELV Environmental Directives